

FIG. 1

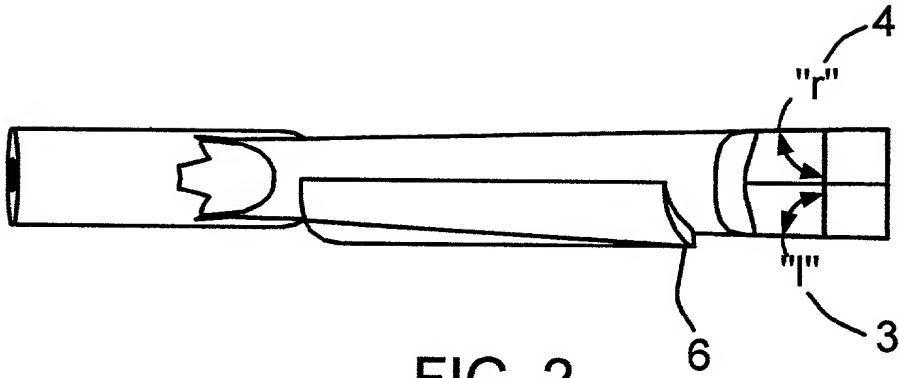


FIG. 2

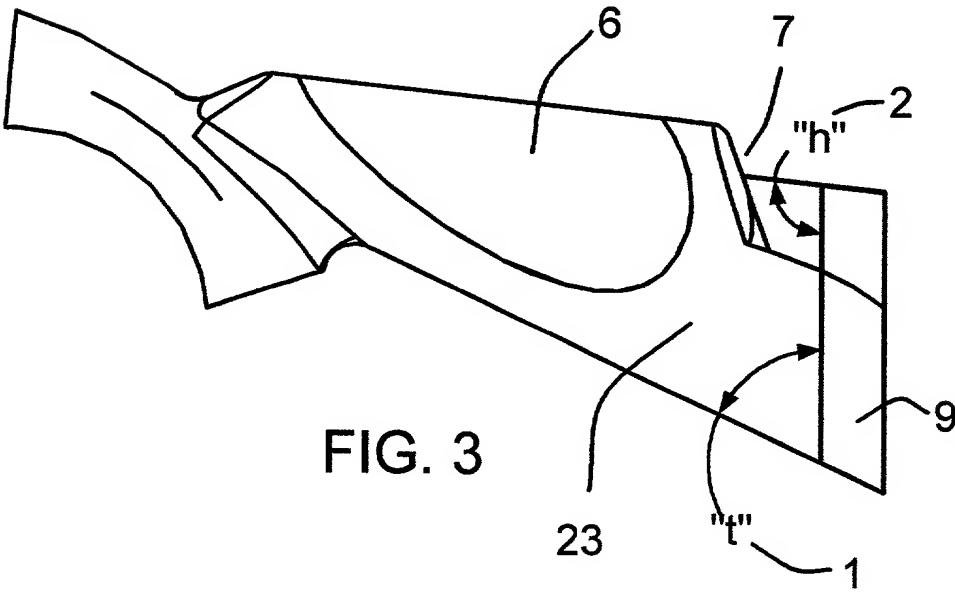


FIG. 3

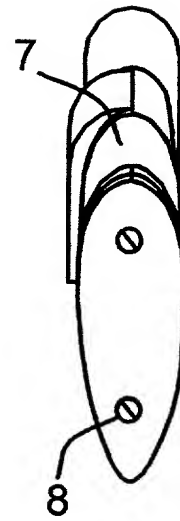


FIG. 4

204010 T286E001

3/12

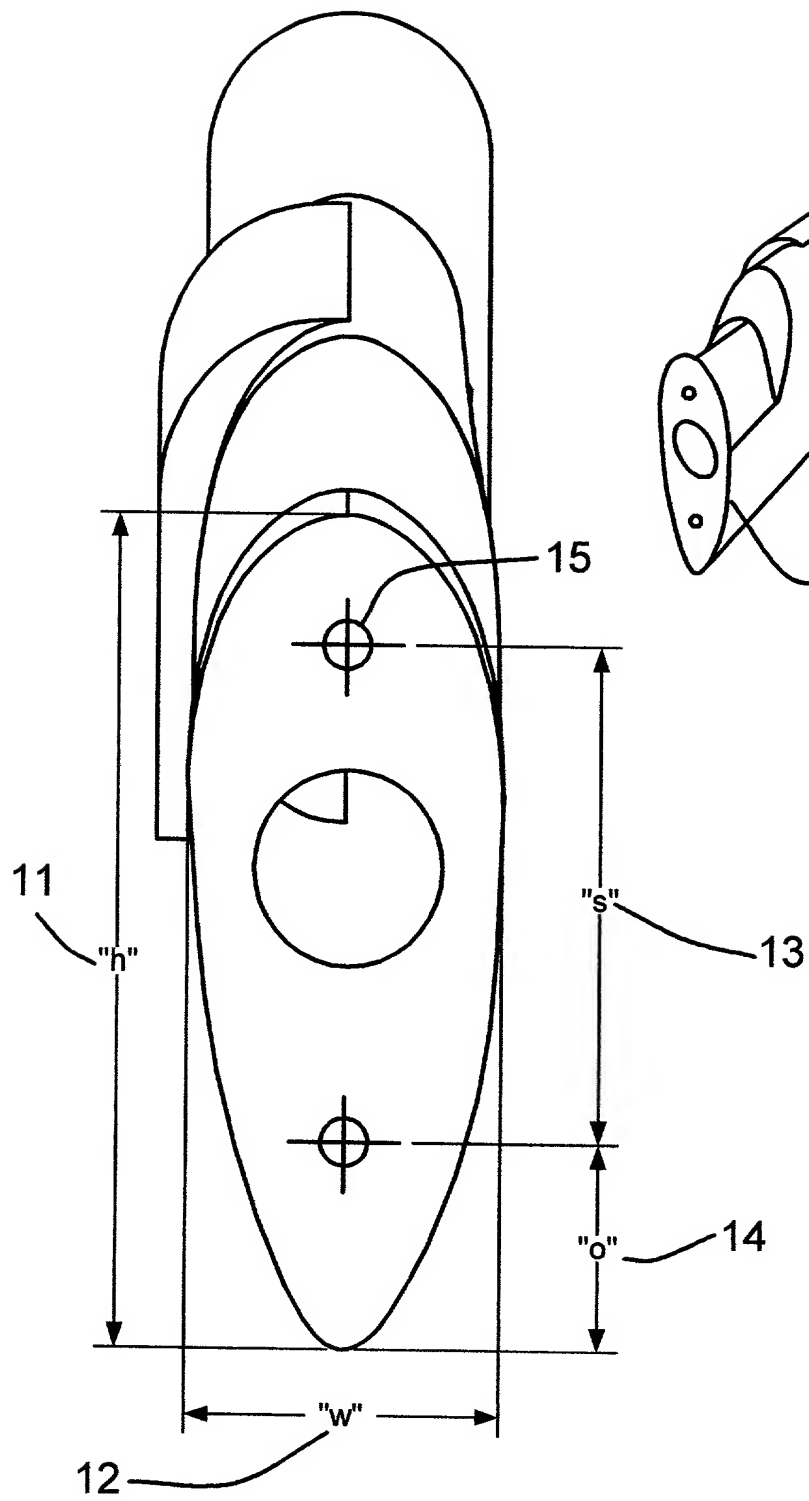


FIG. 5

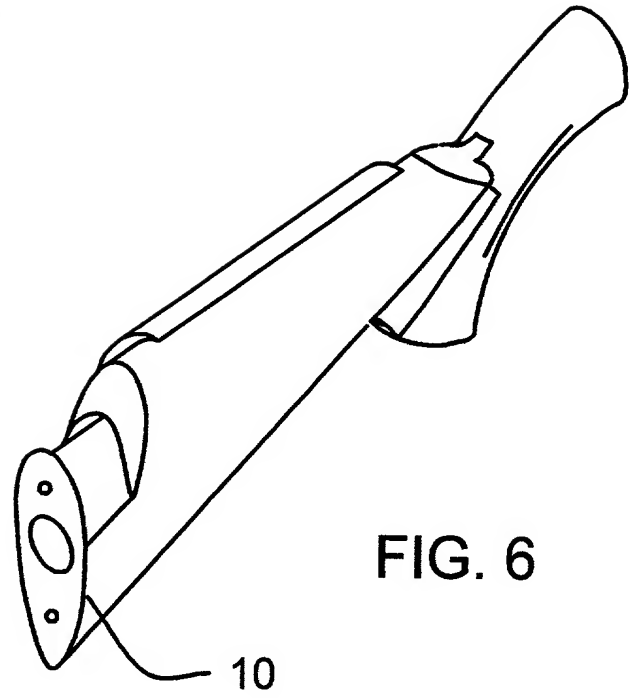


FIG. 6

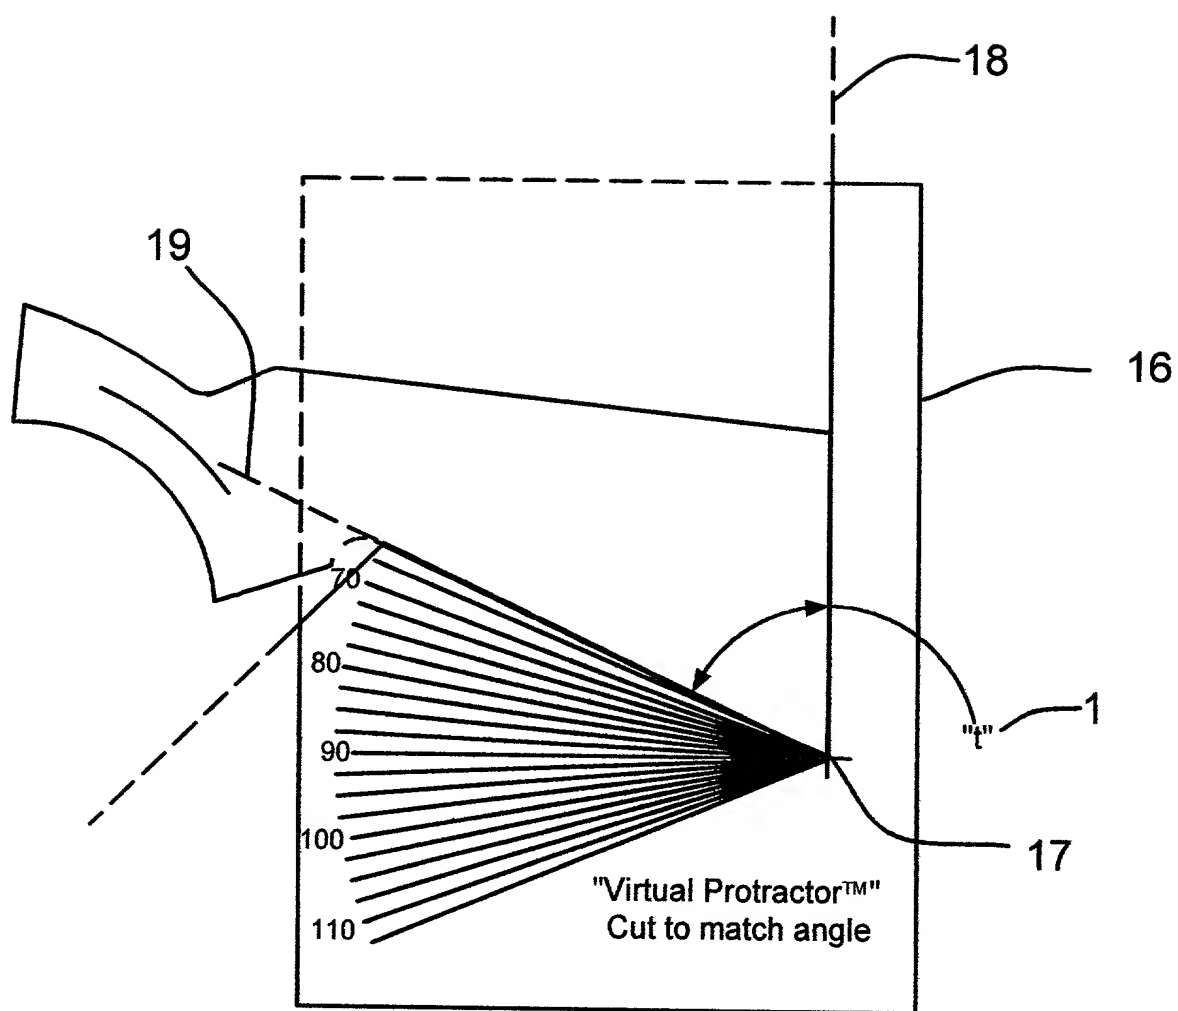


FIG. 7

204070-1.235E00F

5/12

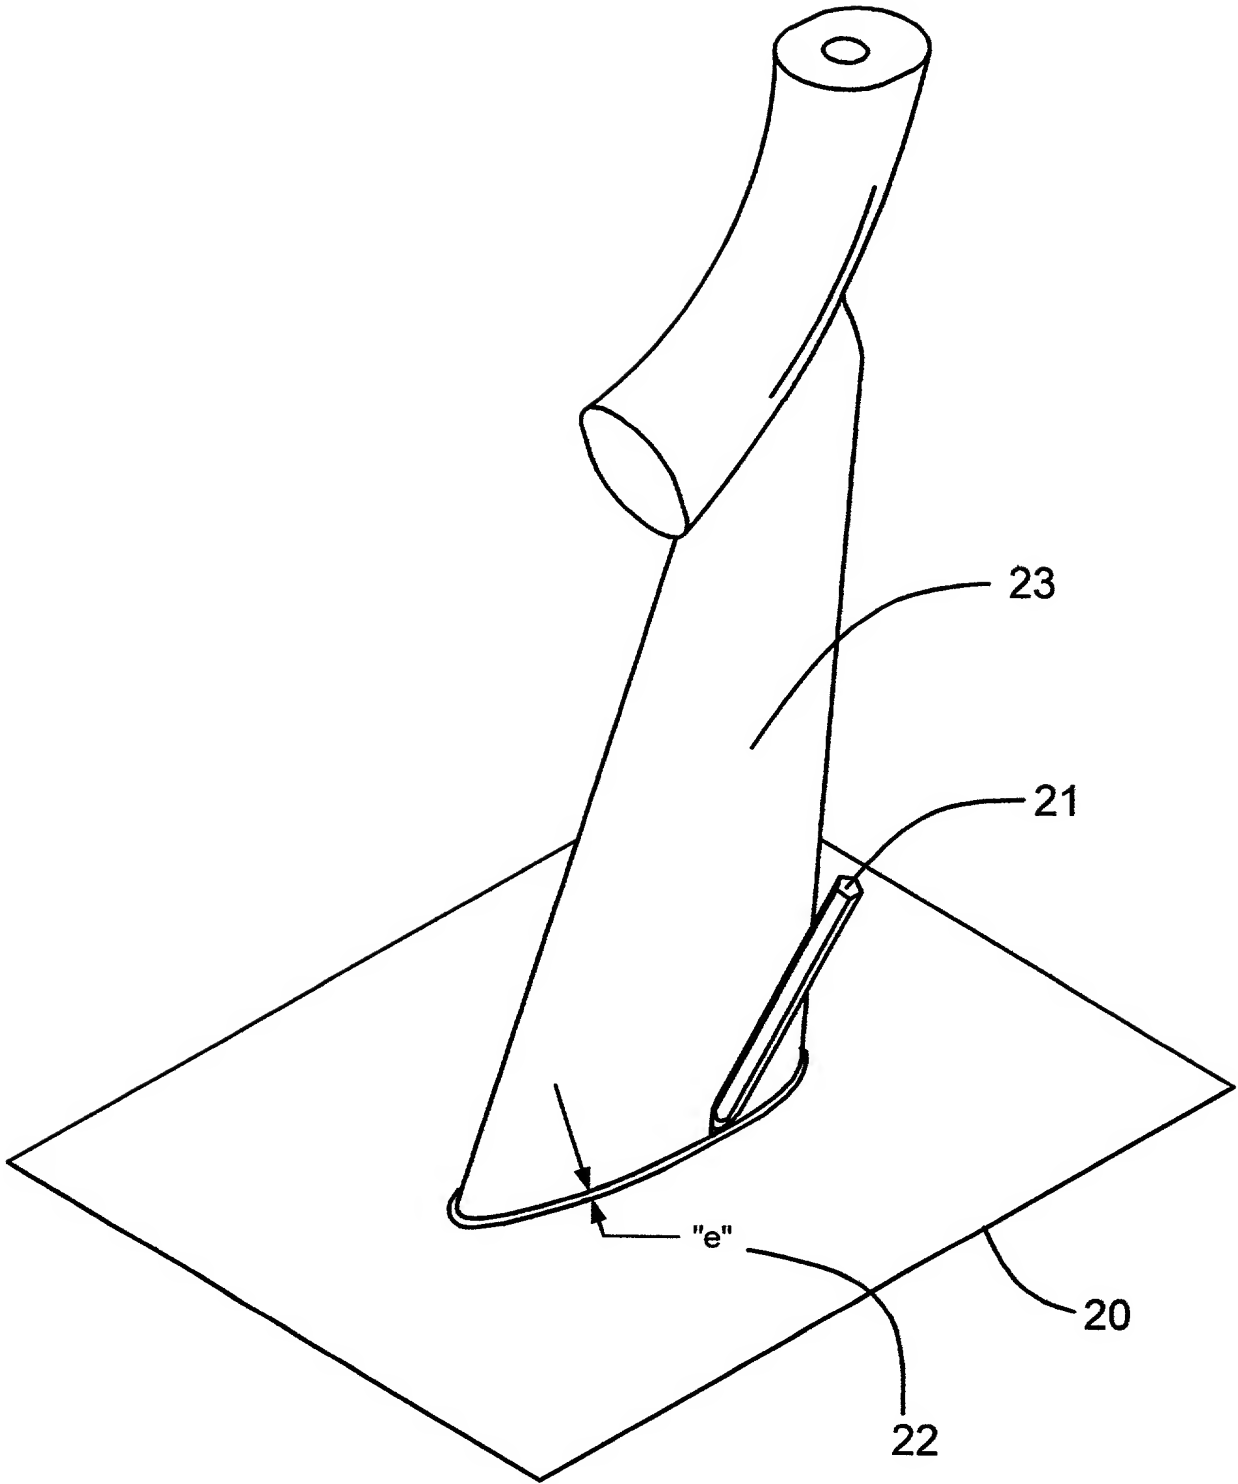


FIG. 8

6/12

**Pro-Fit® Recoil Pads**

Profile & Parametric

Data Acquisition Form ©

Copyright December 2000,

Eclectic Technologies Inc.

, Farmington CT

**Note:**


If you do not have real  
measuring tools,

use Eclectic's Print-on-Paper

**Virtual-Protractor® & Virtual-**

**Scale®**

to accurately determine  
dimensions!

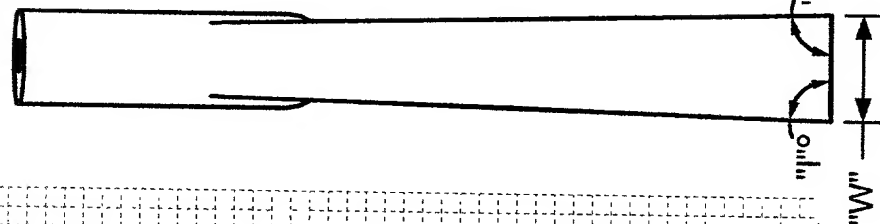

Grid Scale:

1 division = 1/125 Inch

**Accurately Trace Stock**

**Profile & Screw Hole Locations Here**  
(\* Use fine tip pen or pencil to minimize  
tracing offset error "O", which is the  
distance from the center of the traced  
line to the actual edge of the stock)

**DIMENSIONAL DATA**

(measured accurately from stock)

Bottom "toe" Angle, t = °

Top "heel" Angle, h = °

Maximum Length, L = °

Maximum Width, W = inches

Screw Spacing, S = inches

Bottom Screw Position, P = inches

Estimated Trace Offset\*, O = inches

Specify Desired Fit with Stock (check one)

☐ Oversize, Specify inches\*\* larger than stock

☐ Exact Fit, Flush with Stock

☐ Undersize, Specify inches\*\* smaller than stock

\*\* Distance is offset from edge, not overall size.

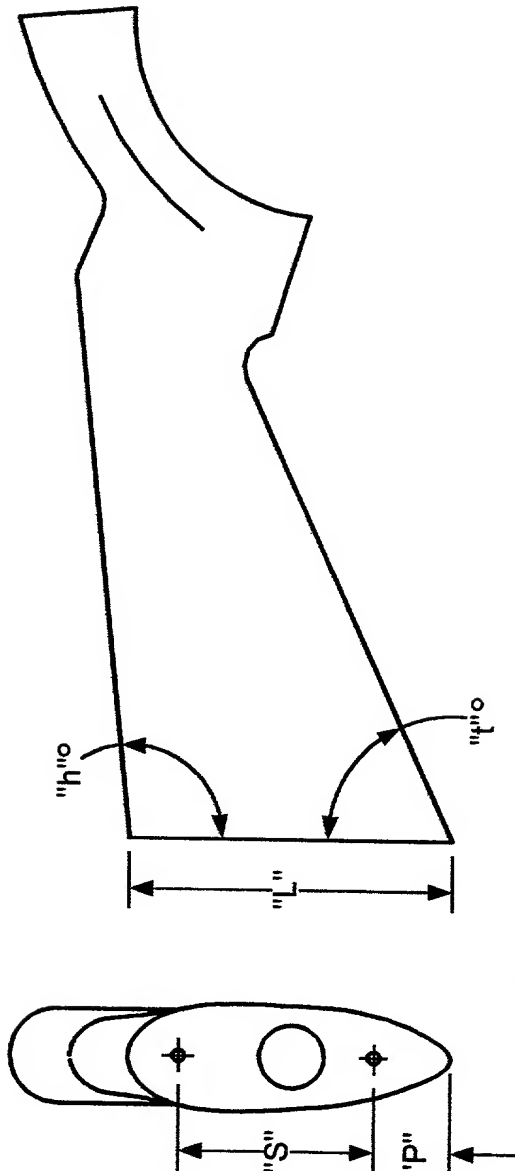


FIG. 9

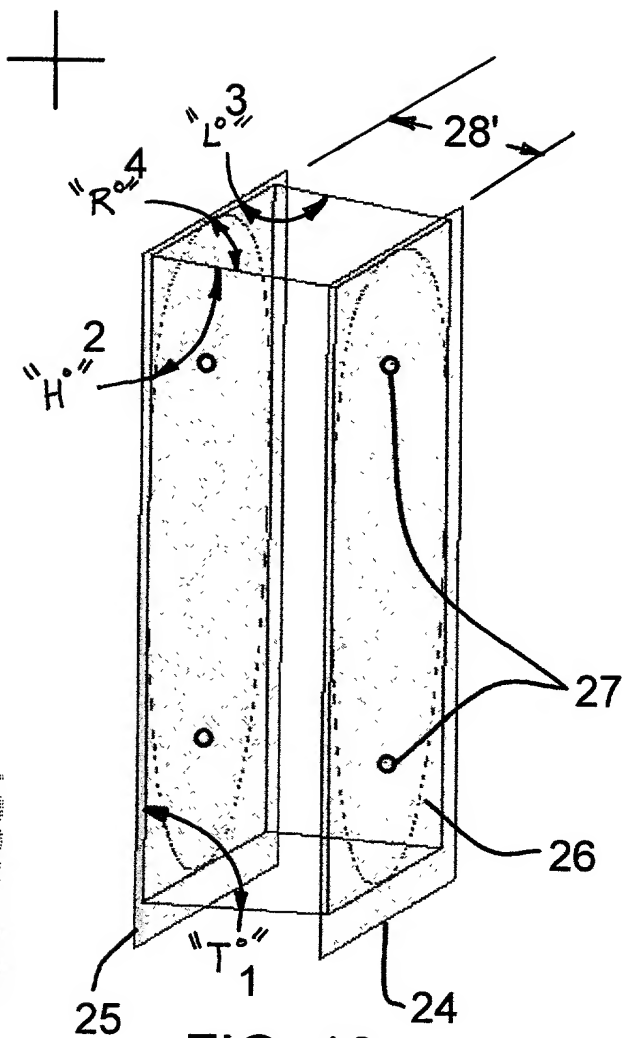


FIG. 10

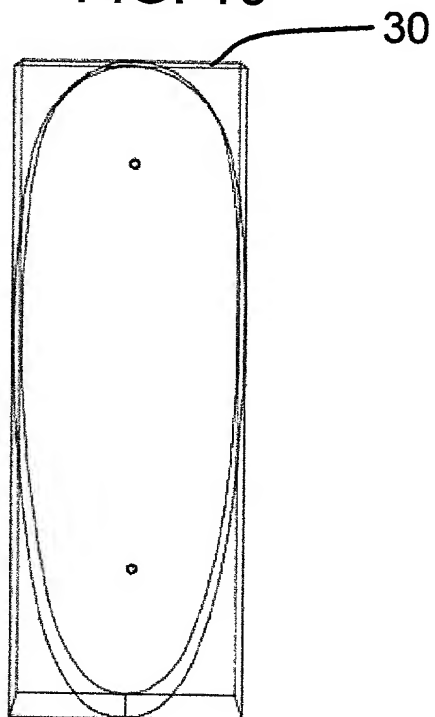


FIG. 12

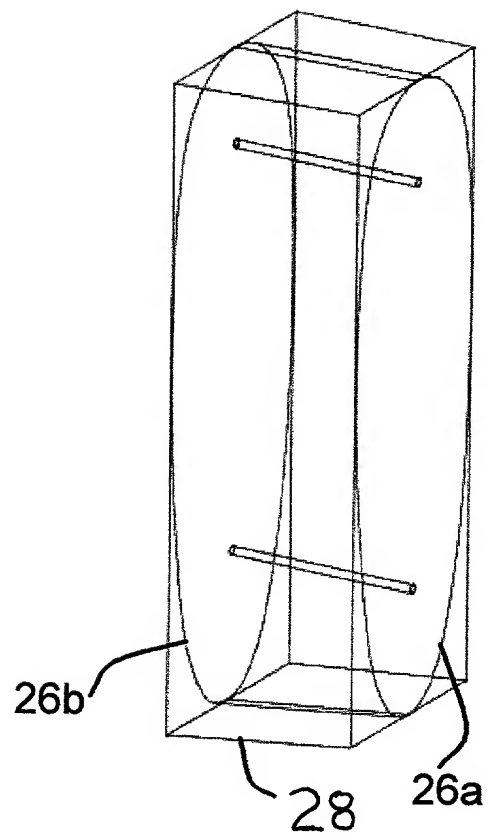


FIG. 11

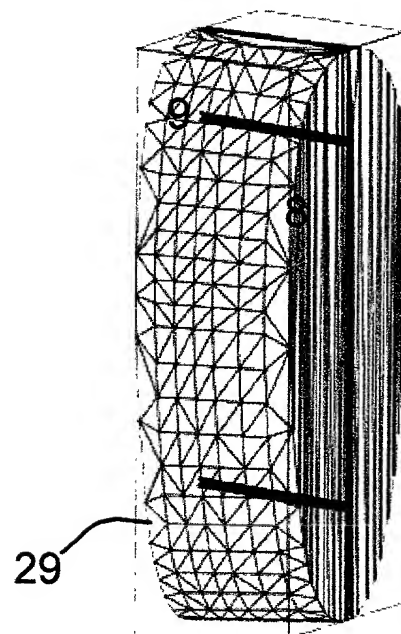


FIG. 13

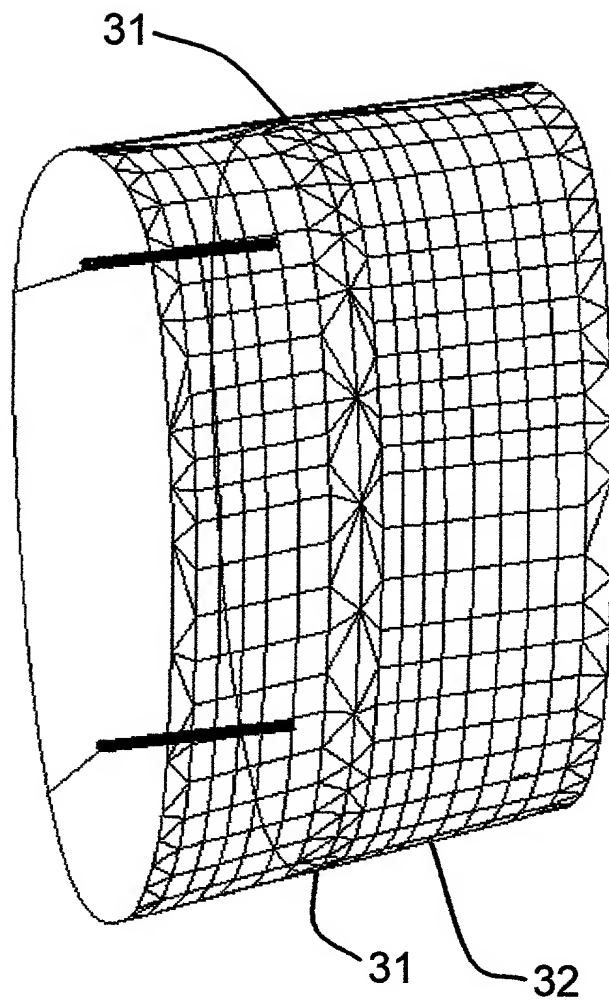


FIG. 14

9/12

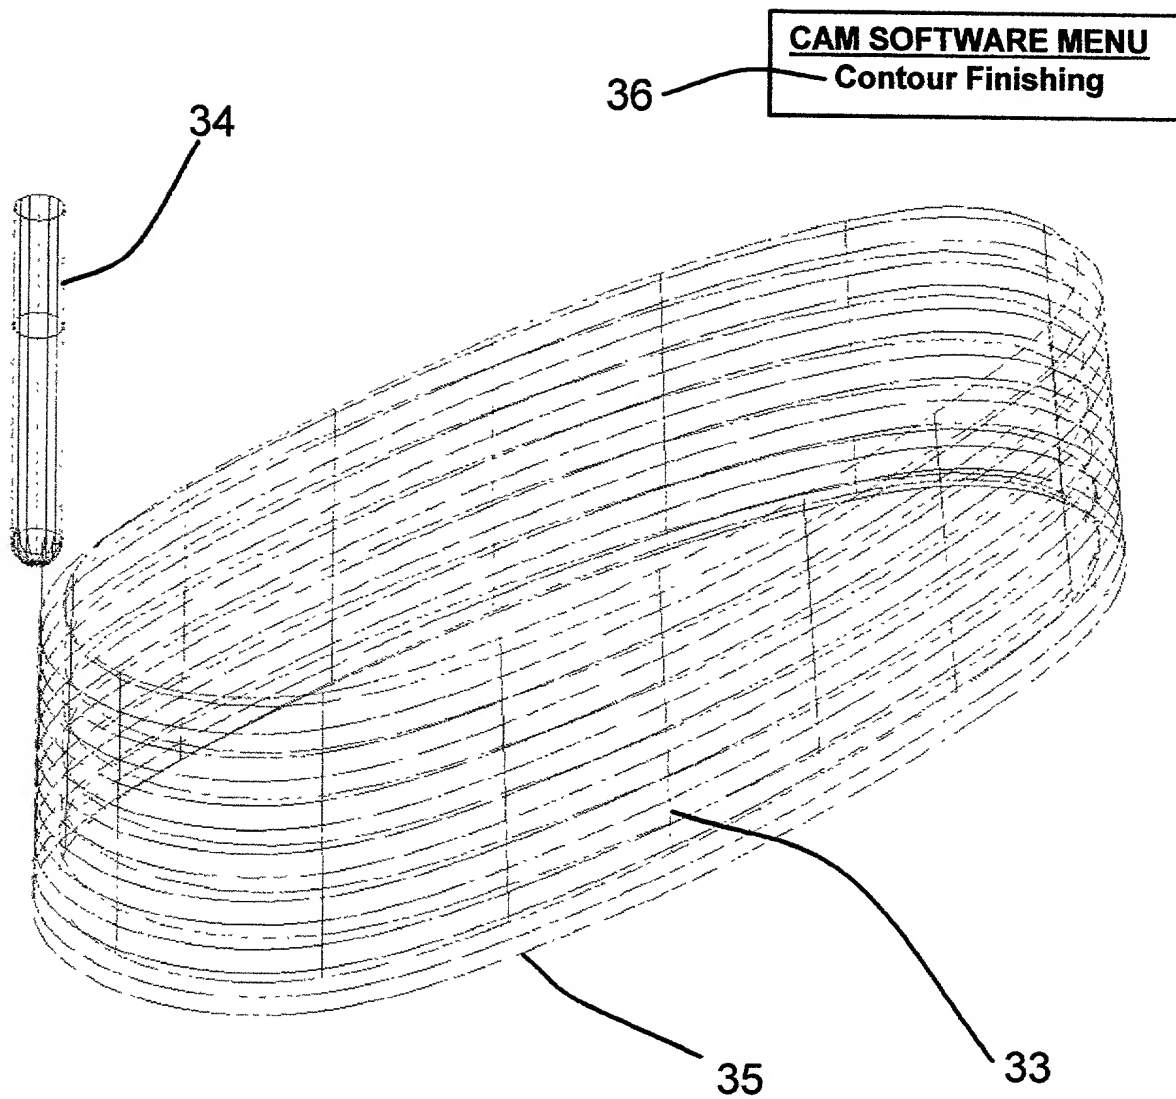


FIG. 15

10/12

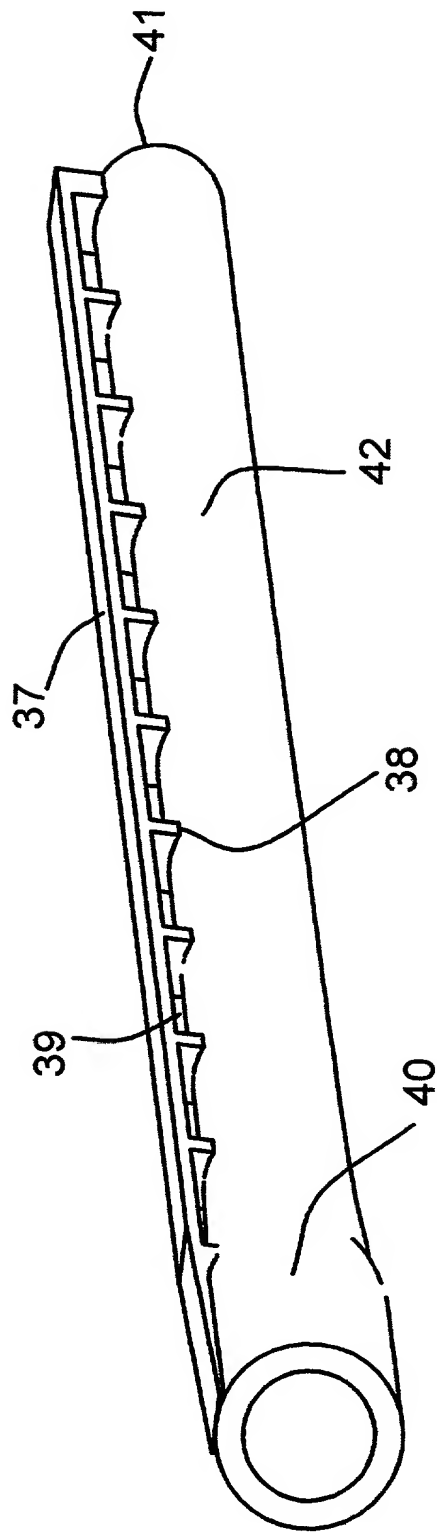



FIG. 16

**Dimensional Data:**

Measure Length to nearest 1/16 inch

Measure Diameter in 1/1000 inch

L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17
D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	D11	D12	D13	D14	D15	D16	D17

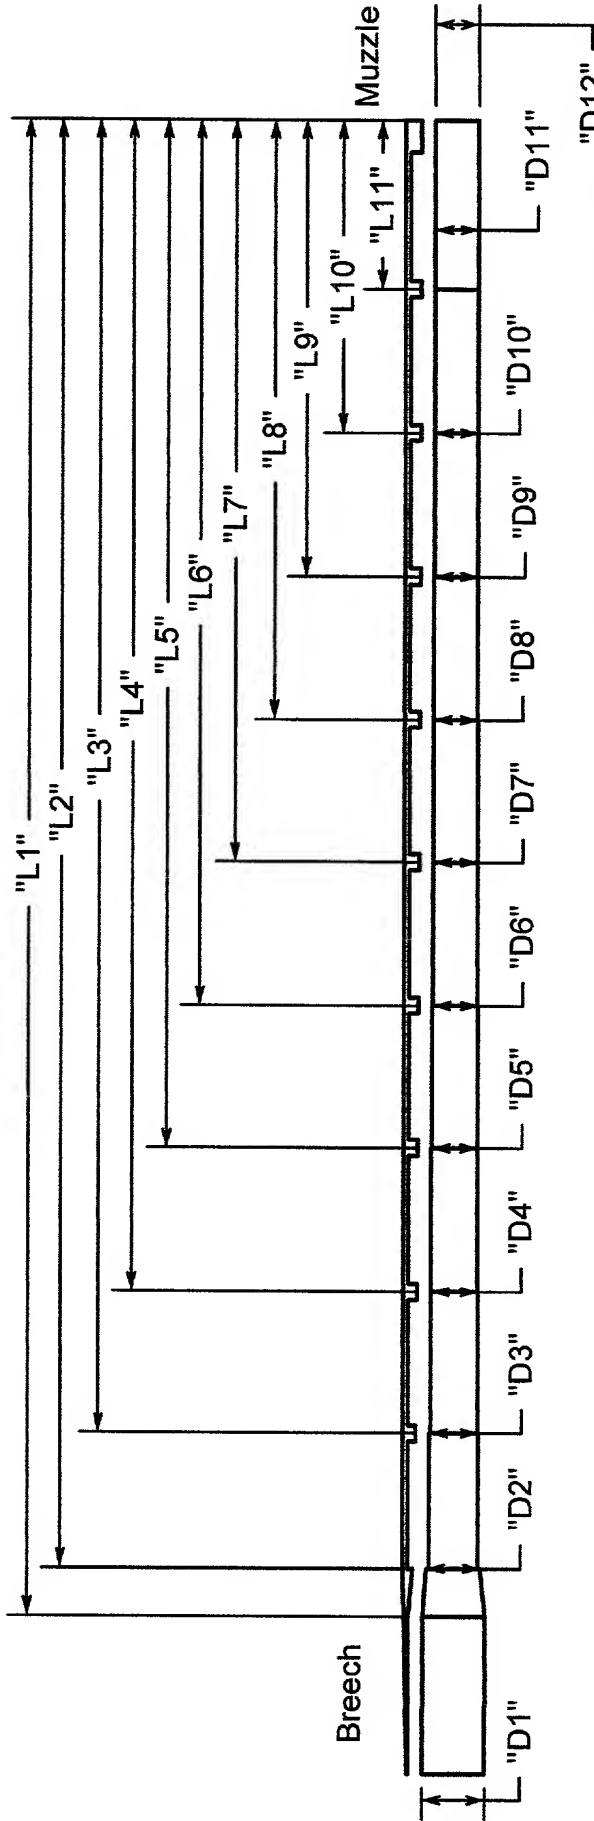

Pro-Fit™ Ventilated Shotgun Rib  
Parametric Data Acquisition Form ©  
Copyright December 2000,  
Eclectic Technologies Inc., Farmington CT

**FIG. 17**

12/12

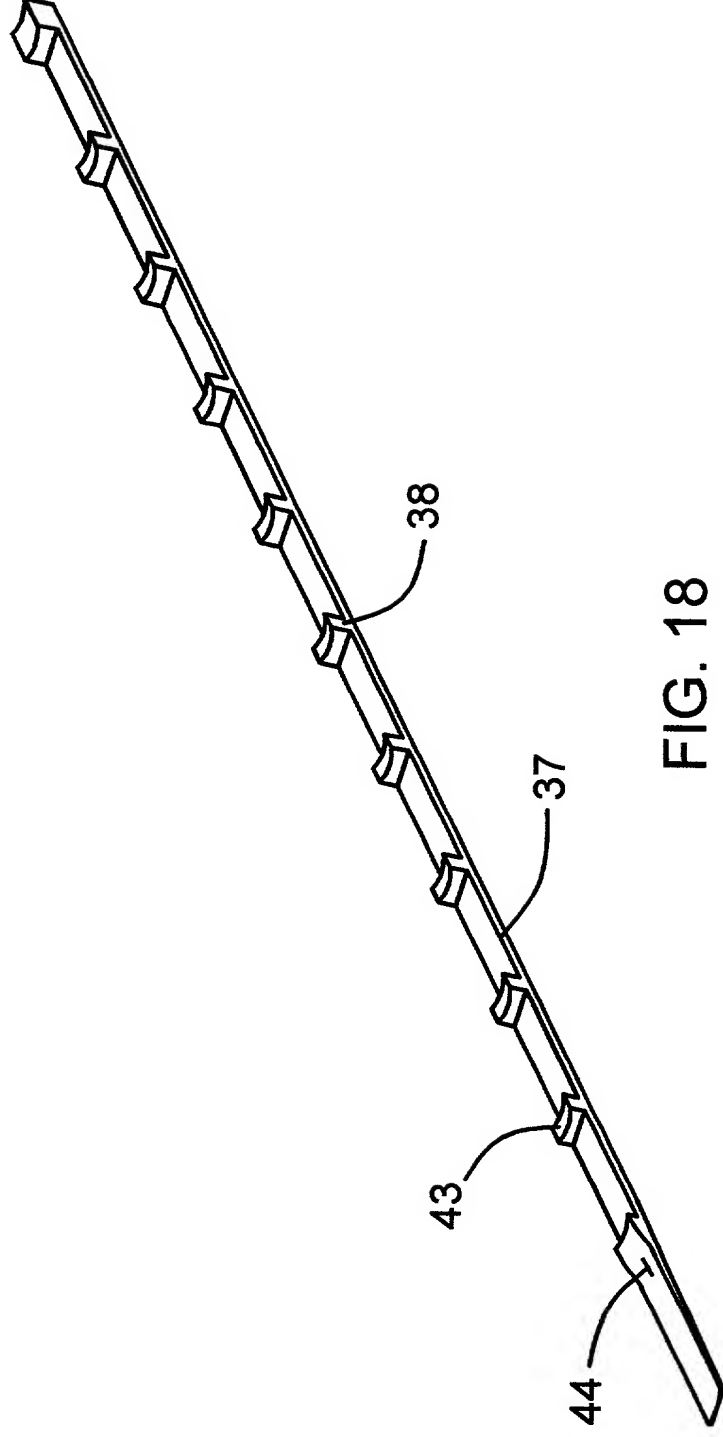


FIG. 18

